

## 26.8.1 Editors - Properties Editor - Modifiers Properties Tab - Modify modifiers

Detailed table of content.....	1
Modify modifiers.....	6
Data Transfer Modifier.....	6
Mesh Cache modifier.....	9
Mesh Sequence Cache Modifier.....	10
Normal Edit modifier.....	12
Weighted Normal Modifier.....	13
UV Project modifier.....	14
UV Warp modifier.....	15
Vertex Weight Edit Modifier.....	16
Vertex Weight Mix Modifier.....	18
Vertex Weight Proximity Modifier.....	21
Multiple Strokes.....	24
Simplify modifier.....	25
Subdivide modifier.....	26

### Detailed table of content

#### Detailed table of content

Detailed table of content.....	1
Modify modifiers.....	6
Data Transfer Modifier.....	6
Usage.....	6
Source Object.....	6
Object transform.....	6
Mix Mode.....	6
Mix Factor.....	6
Vertex Group.....	6
Generate Data Layers.....	6
Vertex data.....	7
Vertex Groups / Bevel Weight.....	7
Mapping.....	7
Vertex Groups.....	7
Layer Selection.....	7
Layer Mapping.....	7
Edge Data.....	7
Sharp, UV Seam, etc.....	7
Mapping.....	7
Face Corner Data.....	7
Custom normals, Vertex Colors, UV's.....	7
Mapping.....	7
Vertex Colors.....	8
Layer Selection.....	8
Layer Mapping.....	8
UV's.....	8
Layer Selection.....	8

Layer Mapping.....	8
Island Precision.....	8
Face Data.....	8
Smooth / Freestyle Mark.....	8
Mapping.....	8
Topology Mapping.....	8
Max Distance.....	8
Only Neighbor Geometry.....	8
Ray Radius.....	8
Mesh Cache modifier.....	9
Format.....	9
File Path.....	9
Influence.....	9
Deform Mode.....	9
Interpolation.....	9
Time Remapping.....	9
Frame / Time / Factor.....	9
Play Mode.....	9
Frame Start.....	9
Frame Scale.....	10
Axis Mapping.....	10
Forward/Up Axis.....	10
Flip Axis.....	10
Mesh Sequence Cache Modifier.....	10
Data property.....	10
Data browser.....	10
Name.....	10
Fake User.....	10
Open Cache File.....	10
Remove.....	11
File Path.....	11
Load File.....	11
Refresh Active.....	11
Sequence.....	11
Override Frame.....	11
Frame.....	11
Frame Offset.....	11
Manual Transform.....	11
Scale.....	11
Object Path.....	11
Read Data.....	11
Vertex Interpolation.....	11
Velocity Scale.....	11
Normal Edit modifier.....	12
Mode.....	12
Radial.....	12
Directional.....	12
Target.....	12
Parallel Normals.....	12
Mix.....	12
Mix Mode.....	12
Mix Factor.....	12
Vertex Group.....	12

Max Angle.....	13
Lock Polygon Normals.....	13
Offset.....	13
Weighted Normal Modifier.....	13
Weighting Mode.....	13
Face Area.....	13
Corner Angle.....	14
Face Area and Angle.....	14
Weight.....	14
Threshold.....	14
Keep Sharp.....	14
Face Influence.....	14
Vertex Group.....	14
Invert.....	14
UV Project modifier.....	14
UV Map.....	15
Aspect X/Y and Scale X/Y.....	15
Projectors.....	15
Objects.....	15
UV Warp modifier.....	15
Usage.....	15
UV Layer.....	15
UV Center.....	15
Axis U / V.....	16
Object From, To.....	16
Vertex Group.....	16
Invert.....	16
Vertex Weight Edit Modifier.....	16
Vertex Group.....	16
Default Weight.....	16
Group Add.....	16
Group Remove.....	16
Falloff.....	17
Type.....	17
Linear.....	17
Custom Curve.....	17
Sharp, Smooth, Root and Sphere.....	17
Random.....	17
Median Step.....	17
Invert.....	17
Influence.....	17
Global Influence.....	17
Mask Vertex Group.....	17
Invert.....	17
Mask Texture.....	17
Texture Property.....	18
Texture Browser.....	18
Name.....	18
Fake User.....	18
New Texture.....	18
Remove.....	18
Show Texture in Texture Tab.....	18
Channel.....	18

Texture Coordinates.....	18
Vertex Weight Mix Modifier.....	18
Vertex Group A.....	19
Vertex Group B.....	19
Default Weight A.....	19
Default Weight B.....	19
Vertex Set.....	19
All.....	19
Vgroup A.....	19
Vgroup B.....	19
Vgroup A or B.....	19
Vgroup and B.....	19
Mix Mode.....	19
Replace weights.....	19
Add to weights.....	19
Subtract from weights.....	20
Multiply weights.....	20
Divide weights.....	20
Difference.....	20
Average.....	20
Influence.....	20
Global Influence.....	20
Mask Vertex Group.....	20
Invert.....	20
Mask Texture.....	20
Texture Property.....	20
Texture Browser.....	20
Name.....	20
Fake User.....	21
New Texture.....	21
Remove.....	21
Show Texture in Texture Tab.....	21
Channel.....	21
Texture Coordinates.....	21
Vertex Weight Proximity Modifier.....	21
Vertex Group.....	21
Target Object.....	21
Proximity mode.....	22
Object.....	22
Geometry.....	22
Lowest.....	22
Highest.....	22
Normalize Weights.....	22
Falloff.....	22
Type.....	22
Linear.....	22
Custom Curve.....	22
Sharp, Smooth, Root and Sphere.....	22
Random.....	22
Median Step.....	22
Invert.....	22
Influence.....	23
Global Influence.....	23

Mask Vertex Group.....	23
Invert.....	23
Mask Texture.....	23
Texture Property.....	23
Texture Browser.....	23
Name.....	23
Fake User.....	23
New Texture.....	23
Remove.....	23
Show Texture in Texture Tab.....	23
Channel.....	23
Texture Coordinates.....	24
Multiple Strokes.....	24
Duplicates.....	24
Distance.....	24
Offset.....	24
Fade.....	24
Center.....	24
Thickness.....	24
Opacity.....	24
Influence.....	24
Layer.....	24
Invert.....	24
Pass.....	25
Invert.....	25
Material.....	25
Invert.....	25
Pass.....	25
Invert.....	25
Simplify modifier.....	25
Mode.....	25
Fixed.....	25
Adaptive.....	25
Sample.....	25
Merge.....	25
Iterations.....	26
Influence.....	26
Layer.....	26
Invert.....	26
Pass.....	26
Invert.....	26
Material.....	26
Invert.....	26
Pass.....	26
Invert.....	26
Subdivide modifier.....	26
Subdivision Type.....	26
Catmull-Clark.....	26
Simple.....	27
Subdivisions.....	27
Influence.....	27
Layer.....	27
Invert.....	27


Pass.....	27
Invert.....	27
Material.....	27
Invert.....	27
Pass.....	27
Invert.....	27

# Modify modifiers

## Data Transfer Modifier

The Data Transfer modifier transfers several types of data from one mesh to another. Data types include vertex groups, UV maps, vertex colors, custom normals...

Transfer works by generating a mapping between source mesh's items (vertices, edges, etc.) and destination ones, either on a one-to-one basis, or mapping several source items to a single destination one, using interpolation.

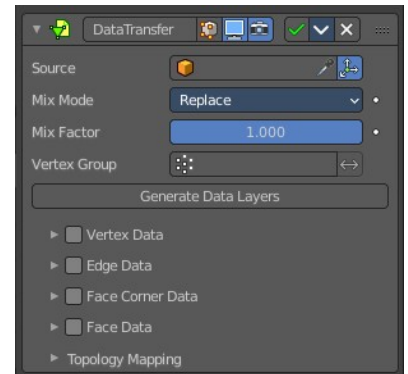

## Usage

Using this modifier will not create destination data layers. Use the Generate Data Layers button for this purpose when you are done with selecting the set of source data to transfer.

Creating those data layers on destination mesh is not part of the modifier stack. This means that they will remain. Even once the modifier is deleted, or if the source data selection is modified.

## Source Object

Mesh object to copy the data from.

## Object transform

Evaluate the source and destination objects in global space instead of local space.

## Mix Mode

How to mix the destination elements with the source elements.



## Mix Factor

How much of the transferred data gets mixed into existing one (not supported by all data types).

## Vertex Group

Allows per-item fine control of the mix factor. Vertex group influence can be reverted using the small “arrow” button to the right.

## Generate Data Layers

This modifier cannot generate needed data layers itself. Adjust the settings to your needs, then press this button to generate matching destination layers, if needed.

## Vertex data

Activate this group when you want to transfer vertex data.

### ***Vertex Groups / Bevel Weight***

Which vertex data layers to transfer. Vertex groups or Bevel weight.

### ***Mapping***

The vertex mapping method to use.

### **Vertex Groups**





Just active with data layer Vertex groups.

### ***Layer Selection***

What layer from the source object gets selected.

### ***Layer Mapping***

How to match the destination layer.

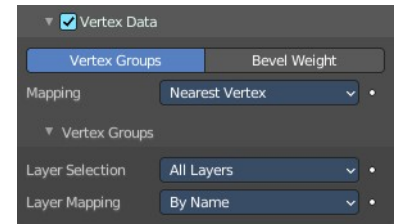

## Edge Data



Activate this group when you want to transfer edge data.

### ***Sharp, UV Seam, etc.***

Which edge data layers to transfer. You can just use one method.

### ***Mapping***

The edge mapping method to use.





## Face Corner Data

### ***Custom normals, Vertex Colors, UV's***

Which face corner data to transfer. You can just use one method.

### ***Mapping***

The face corner data mapping method to use.

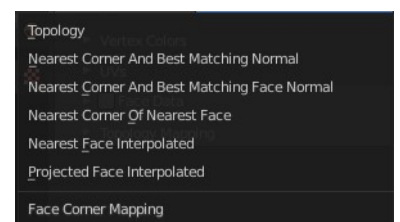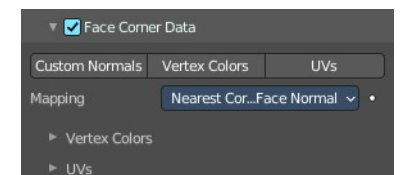

## Vertex Colors




Further settings for when you choose Vertex colors.

### Layer Selection

Source Layer Selection.

### Layer Mapping

Destination layer mapping.



## UV's




Further settings for when you choose UV's.

### Layer Selection

Source Layer Selection.

### Layer Mapping

Destination layer mapping.



### Island Precision

The factor to control the island handling. A value of 0.0 means no island handling. A value of 0.02 is a good starting point.



## Face Data

### Smooth / Freestyle Mark

Which poly data layers to transfer.

### Mapping

The face mapping method.



## Topology Mapping


### Max Distance

### Only Neighbor Geometry

For non topology mapping, the source elements must be closer than the value in the edit box.

### Ray Radius

The width of rays.






## Mesh Cache modifier

The Mesh Cache modifier allows you to apply animated mesh data to a mesh. And deform it when playing back.


This works in a similar way to shape keys. But uses external files, and allows to interchange between applications.

Tip! Both MDD and PC2 depend on the vertex order on the mesh remaining unchanged. This is a limitation of this method, so take care not to add/remove/reorder vertices once this modifier is used.

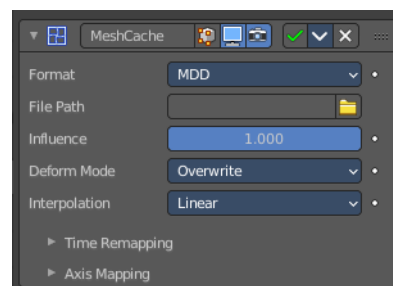

### Format

The input file format (currently .mdd and .pc2 are supported).



### File Path


Path to the cache file.

### Influence

Factor to adjust the influence of the modifier's deformation.

### Deform Mode

This setting defaults to Overwrite which will replace the vertex locations with those in the cache file.




When you want to mix a mesh cache file with shape keys, then you can select the Deform option which integrates deformations with the mesh cache result.

Note that this feature is limited to making smaller, isolated edits and will not work for larger changes such as re-posing limbs.

### Interpolation


The blend mode between frames. Use linear when the frames in the cache file do not match up exactly with the frames in the blend-file.



### Time Remapping

#### **Frame / Time / Factor**

How time is calculated.

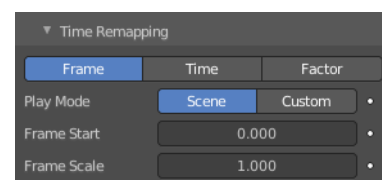

#### **Play Mode**

How playback operates.

#### **Frame Start**

Play the cache starting from this frame.


## **Frame Scale**

Scale time by this factor (applied after the start value).

## **Axis Mapping**

### **Forward/Up Axis**

The axis for forward and up used in the source file.




### **Flip Axis**


Allows you to flip the coordinates on an axis.

## **Mesh Sequence Cache Modifier**

The Mesh Sequence Cache modifier loads data from Alembic files. It supports static meshes, but is mostly used to load animated meshes. Despite its name, this modifier also supports curves. It also handles file sequences, as well as meshes and curves with varying topology (like the result of fluid simulations).

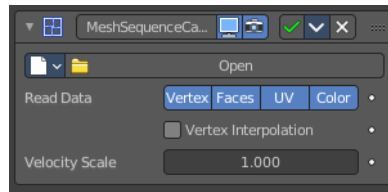

When importing an Alembic file, Mesh Sequence Cache modifiers are automatically added to time-varying meshes. For time-varying object transforms (so animation of rotation, location, or scale), the Transform Cache Constraint is used.

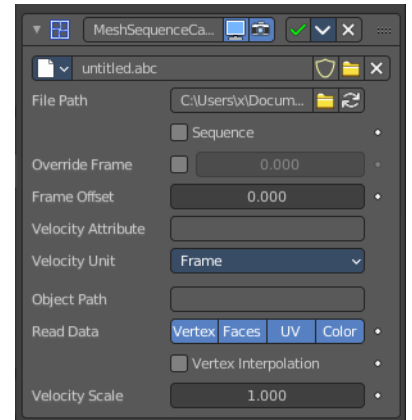

## **Data property**

### **Data browser**

List of available Alembic files.

### **Name**

The name of the current active alembic file.

### **Fake User**

Keep this file in the scene even when it has no user anymore.

### **Open Cache File**

Open an alembic file.



## ***Remove***

Remove the alembic file.

## **File Path**

Path to the Alembic file.

## ***Load File***

Open an alembic file.

## ***Refresh Active***

Update the files and paths.

## **Sequence**

Whether or not the cache is separated in a series of files.

## **Override Frame**

Whether to use a custom frame for looking up data in the cache file, instead of using the current scene frame.

## ***Frame***

The time to use for looking up the data in the cache file, or to determine which to use in a file sequence.

## **Frame Offset**

Define a frame offset to the current frame.

## **Manual Transform**

### ***Scale***

Value by which to enlarge or shrink the object with respect to the world's origin. (Only applicable through a Transform Cache Constraint.)

## **Object Path**

The path to the Alembic object inside the archive.

## **Read Data**

Type of data to read for a mesh object. Vertices, polygons, UV maps and Vertex Color layers.

## **Vertex Interpolation**

Allow interpolation of vertex positions.

## **Velocity Scale**



Multiplier used to control the magnitude of the velocity for time effects.

## Normal Edit modifier

The Normal Edit modifier affects (or generates) custom normals. It uses a few simple parametric methods to compute them, and mixes back those generated normals with existing ones.

Note! This modifier requires custom normals to be enabled, which can be done by enabling Auto Smooth in the Properties.

Tip. More complex normal manipulations can be achieved by copying normals from one mesh to another, see the Data Transfer Modifier. Some shading effects can also make use of the Weighted Normals modifier.

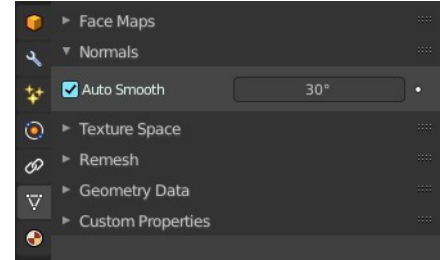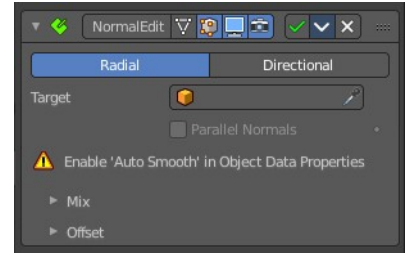

### Mode

#### **Radial**

Aligns normals with the (origin, vertex\_coordinates) vector, in other words all normals seems to radiate from the given center point, as if they were emitted from an ellipsoid surface.

#### **Directional**

Makes all normals point (converge) towards a given target object.

### Target

Uses this object's origin as reference point when generating normals. A Target object is optional in Radial mode, but mandatory in Directional mode.

### Parallel Normals



Only relevant in Directional mode. Makes all normals parallel to the line between both objects' origins, instead of converging towards target's origin.

### Mix

#### **Mix Mode**

How to affect existing normals with newly generated ones.

Note that the Multiply option is not a cross product, but a mere component-by-component multiplication.

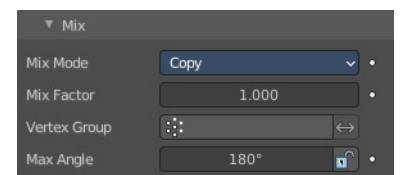

#### **Mix Factor**

How much of the generated normals get mixed into existing ones.

#### **Vertex Group**

Allows per-item fine control of the mix factor. The vertex group influence can be reverted by using the small

“arrow” button to the right.

## Max Angle

Forbids new generated normals to have an angle to the original normal above that given threshold. This is useful to prevent extreme changes, that can even lead to inverting the front/back sides of a face, and consequently to ugly shading artifacts.


## Lock Polygon Normals

Prevents flipping (reversing front/back sides) of polygons which normal does not match anymore the side to which point its corners' custom normals. Can also help avoiding shading issues.

## Offset


Gives the origin of the modified object an offset before using it to generate normals.

Offset is only relevant in Radial mode if no Target Object is set, and in Directional mode when Parallel Normals is set.




## Weighted Normal Modifier

This modifier allows you to change the custom normals of a mesh. This can be useful to make some faces appear very flat during shading, among other effects.

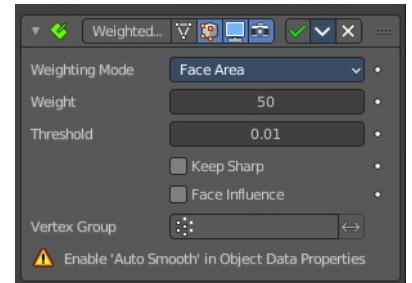

Note! This modifier requires custom normals to be enabled, which can be done by enabling Auto Smooth in the Properties.

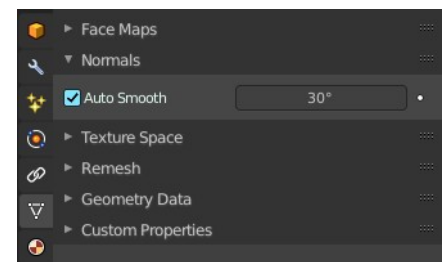

## Weighting Mode

The normals around a vertex will be combined to create a custom (per face corner) normal using various weights for each. The Weighting Mode defines how to compute the weights.



## Face Area

Weight according to the area of the face that the normal originates. A larger area means that the normal from that face will get a higher weight in final result.

## **Corner Angle**

Weight according to the angle each face forms at the vertex.

## **Face Area and Angle**

Weights are obtained by multiplying the face area and corner angle ones.

## **Weight**

Determines how strongly the weights are biased according to the face areas and/or corner angles, a bit like a contrast setting for a picture.

A value of 50 means all faces are weighted uniformly.

More than 50 means faces with higher area or angles are given even more weight (more “contrast”).

Less than 50 means faces with higher area or angles are given lesser weights (less “contrast”).

## **Threshold**

A weight-rounding threshold which means that, if two angles or areas differ by less than that threshold, they will get equal weights.

## **Keep Sharp**

Preserve sharp edges, though smoothing will still happen if there are multiple faces between any two sharp edges.

## **Face Influence**

Use face weights as assigned by the Set Strength tool or by the Set Strength mode of a Bevel modifier.

For example, if three faces meet at a vertex and have the face weights weak, medium, and strong, then only the normal associated with the strong face will be used to set the final result.

## **Vertex Group**

If a vertex group is specified, the modifier will only affect those vertices.

## **Invert**


Invert the selection (only affect the vertices not in the vertex group).

---

## **UV Project modifier**

The UV Project modifier acts like a slide projector. It emits a UV map from the negative Z axis of a controller object (such as an empty object), and applies it to the object as the “light” hits it.

UV Project is great for making spotlights more diverse, and also for creating

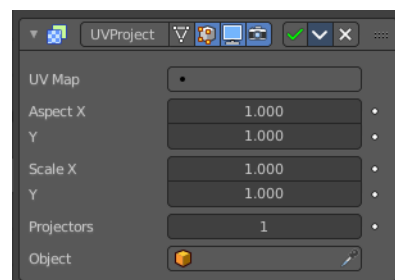

decals to break up repetition.

Usually, an Image Texture node mapped to the UV map that the modifier targets is added to the object's material.

## UV Map

Which UV map to modify. Defaults to the active rendering layer.



## Aspect X/Y and Scale X/Y

Aspect and scale manipulation of the image. Only apply when a camera is used as projector object.

## Projectors


Up to ten projector objects are supported. Each face will choose the closest and aligned projector with its surface normal. Projections emit from the negative Z axis (i.e. straight down a camera or light). If the projector is a camera, the projection will adhere to its perspective/orthographic setting.

## Objects

Specify the projector object(s).

## UV Warp modifier

The UV Warp modifier transforms an object's UV map based on values or two objects. Its purpose is to give you direct control over the object's UV's in the 3D Viewport, allowing you to directly move, rotate, and scale existing UV coordinates using defined values or a controller object or bone.

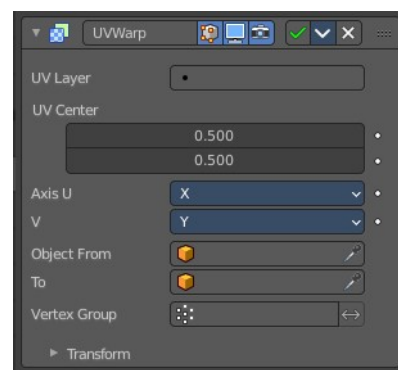

## Usage

How the UV's are warped is determined by the difference between the transforms (location, rotation and scale) of the from and to objects.

If the to object has the same transforms as the from object, the UV's will not be changed.

Assuming the UV Axis of the modifier is X/Y and the scale of the objects is (1, 1, 1), if the to object is one unit away from the from object on the X axis, the UV's will be transformed on the U axis (horizontally) by one full UV space (the entire width of the image).

## UV Layer

Which UV map to modify. Defaults to the active rendering layer.



## UV Center

The center point of the UV map to use when applying scale or rotation. With (0, 0) at the bottom left and (1, 1) at the top right.

## Axis U / V

The axes to use when mapping the 3D coordinates into 2D.

## Object From, To

The two objects used to define the transformation.

## Vertex Group

The vertex group can be used to scale the influence of the transformation per vertex.

## Invert

Invert the selection (only affect the vertices not in the vertex group).


---

## Vertex Weight Edit Modifier

This modifier is intended to edit the weights of a vertex group.

The general process is the following, for each vertex:

(Optional) It does the mapping, either through one of the predefined functions, or a custom mapping curve.

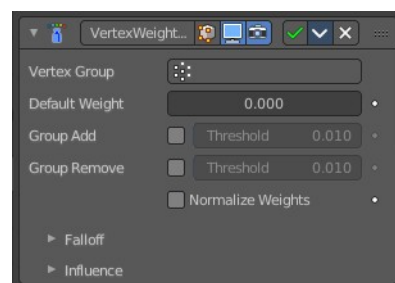

It applies the influence factor, and optionally the vertex group or texture mask (0.0 means original weight, 1.0 means fully mapped weight).

It applies back the weight to the vertex, and/or it might optionally remove the vertex from the group if its weight is below a given threshold, or add it if it is above a given threshold.

Important! This modifier does implicit clamping of weight values in the standard (0.0 to 1.0) range. All values below 0.0 will be set to 0.0, and all values above 1.0 will be set to 1.0.

Note! You can view the modified weights in Weight Paint Mode. This also implies that you will have to disable the Vertex Weight Edit modifier if you want to see the original weights of the vertex group you are editing.

## Vertex Group

The vertex group to affect.

## Default Weight

The default weight to assign to all vertices not in the given vertex group.

## Group Add

Adds vertices with a final weight over Add Threshold to the vertex group.

## Group Remove

Removes vertices with a final weight below Remove Threshold from the vertex group.



## Falloff

### Type

How weights are mapped to their new values.

### Linear

No mapping.

### Custom Curve

Allows the user to manually define the mapping using a curve.

### Sharp, Smooth, Root and Sphere

These are classical mapping functions, from spikiest to roundest.

### Random



Uses a random value for each vertex.

### Median Step

Creates binary weights (0.0 or 1.0), with 0.5 as cutting value.

### Invert

Inverts the falloff.




## Influence

### Global Influence

The overall influence of the modifier (0.0 will leave the vertex group's weights untouched, 1.0 is standard influence).

Important! Influence only affects weights, adding/removing of vertices to/from vertex group is not prevented by setting this value to 0.0. In addition, a per-vertex fine control of the effect is possible using either a vertex group or a texture (both are mutually exclusive). The per-vertex values from those will be multiplied with the Global Influence.



### Mask Vertex Group


Choose a vertex group for masking.

### Invert

Invert vertex group mask influence.

### Mask Texture


Choose a texture for masking. Note that using a mask texture will remove the mask vertex group.



## Texture Property

### **Texture Browser**

A list of the available textures in the scene.



### **Name**

The name of the currently active texture. You can rename the texture here by clicking at the edit box.

### **Fake User**

Keep this texture in the scene even if it has no user.

### **New Texture**

Add a new texture.

### **Remove**


Remove the texture.

### **Show Texture in Texture Tab**

Jumps to the texture tab where you can edit your texture.


## Channel

Which channel of the texture to use for masking.



## Texture Coordinates

Which texture coordinates of the texture to use for masking.




## Vertex Weight Mix Modifier

### Vertex Weight Mix Modifier

This modifier mixes a second vertex group (or a simple value) into the affected vertex group, using different operations.

Important! This modifier does implicit clamping of weight values in the standard (0.0 to 1.0) range. All values below 0.0 will be set to 0.0, and all values above 1.0 will be set to 1.0.

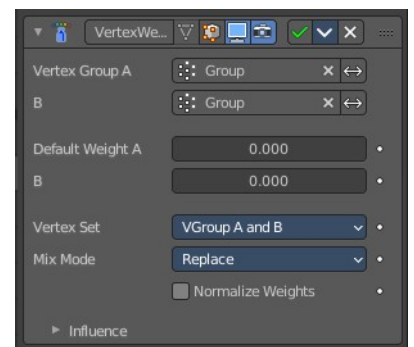

Note! You can view the modified weights in Weight Paint Mode. This also implies that you will have to disable the Vertex Weight Mix modifier if you want to see the original weights of the vertex group you are editing.

## Vertex Group A

The vertex group to affect.

## Vertex Group B

The second vertex group to mix into the affected one. Leave it empty if you only want to mix in a simple value.

## Default Weight A

The default weight to assign to all vertices not in the given vertex group.


## Default Weight B

The default weight to assign to all vertices not in the given second vertex group.

## Vertex Set

Which vertices should be affected.

Important! When using All vertices, Vertices from group B or Vertices from one group, vertices might be added to the affected vertex group.



### ***All***

Affects all vertices, disregarding the vertex groups content.

### ***Vgroup A***

Affects only vertices belonging to the affected vertex group.

### ***Vgroup B***

Affects only vertices belonging to the second vertex group.

### ***Vgroup A or B***

Affects only vertices belonging to at least one of the vertex groups.

### ***Vgroup and B***

Affects only vertices belonging to both vertex groups.

## Mix Mode

How the vertex group weights are affected by the other vertex group's weights.

### ***Replace weights***

Replaces affected weights with the second group's weights.

### ***Add to weights***

Adds the values of Group B to Group A.

## ***Subtract from weights***

Subtracts the values of Group B from Group A.

## ***Multiply weights***

Multiplies the values of Group B with Group A.

## ***Divide weights***

Divides the values of Group A by Group B.

## ***Difference***

Subtracts the smaller of the two values from the larger.


## ***Average***

Adds the values together, then divides by 2.

## **Influence**

### ***Global Influence***

The overall influence of the modifier (0.0 will leave the vertex group's weights untouched, 1.0 is standard influence).



Important! Influence only affects weights, adding/removing of vertices to/from vertex group is not prevented by setting this value to 0.0. In addition, a per-vertex fine control of the effect is possible using either a vertex group or a texture (both are mutually exclusive). The per-vertex values from those will be multiplied with the Global Influence.

### ***Mask Vertex Group***


Choose a vertex group for masking.

### ***Invert***

Invert vertex group mask influence.

### ***Mask Texture***


Choose a texture for masking. Note that using a mask texture will remove the mask vertex group.



### ***Texture Property***

#### ***Texture Browser***

A list of the available textures in the scene.



### ***Name***

The name of the currently active texture. You can rename the texture here by clicking at the edit box.

### ***Fake User***

Keep this texture in the scene even if it has no user.

### ***New Texture***

Add a new texture.

### ***Remove***


Remove the texture.

### ***Show Texture in Texture Tab***

Jumps to the texture tab where you can edit your texture.


### ***Channel***

Which channel of the texture to use for masking.



### ***Texture Coordinates***

Which texture coordinates of the texture to use for masking.




---

## **Vertex Weight Proximity Modifier**

This modifier sets the weights of the given vertex group, based on the distance between the object (or its vertices), and another target object (or its geometry).

**Warning1** This modifier does implicit clamping of weight values in the standard (0.0 to 1.0) range. All values below 0.0 will be set to 0.0, and all values above 1.0 will be set to 1.0.

**Note!** You can view the modified weights in Weight Paint Mode. This also implies that you will have to disable the Vertex Weight Proximity modifier if you want to see the original weights of the vertex group you are editing.

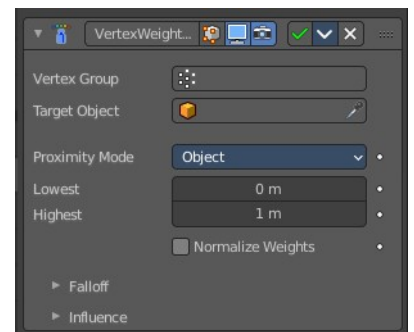

### **Vertex Group**

The vertex group to affect.

### **Target Object**

The object from which to compute distances.

## Proximity mode



### **Object**

Use the distance between the modified mesh object and the target object as weight for all vertices in the affected vertex group.

### **Geometry**

Use the distance between each vertex and the target object, or its geometry.

Note! If you enable more than one of them, the shortest distance will be used. If the target object has no geometry (e.g. an empty or camera), it will use the location of the object itself.

### **Lowest**

Distance mapping to 0.0 weight. Tip! Lowest can be set above Highest to reverse the mapping.


### **Highest**

Distance mapping to 1.0 weight.

## Normalize Weights

Normalize the resulting weights. Without this option they get only clamped within the 0.0 - 1.0 range.

## Falloff



### **Type**


How weights are mapped to their new values.

#### **Linear**

No mapping.

#### **Custom Curve**

Allows the user to manually define the mapping using a curve.



#### **Sharp, Smooth, Root and Sphere**

These are classical mapping functions, from spikiest to roundest.

#### **Random**

Uses a random value for each vertex.

#### **Median Step**

Creates binary weights (0.0 or 1.0), with 0.5 as cutting value.


### **Invert**

Inverts the falloff.

## Influence

### **Global Influence**

The overall influence of the modifier (0.0 will leave the vertex group's weights untouched, 1.0 is standard influence).



Important! Influence only affects weights, adding/removing of vertices to/from vertex group is not prevented by setting this value to 0.0. In addition, a per-vertex fine control of the effect is possible using either a vertex group or a texture (both are mutually exclusive). The per-vertex values from those will be multiplied with the Global Influence.

### **Mask Vertex Group**


Choose a vertex group for masking.

### **Invert**

Invert vertex group mask influence.

### **Mask Texture**


Choose a texture for masking. Note that using a mask texture will remove the mask vertex group.



### **Texture Property**

#### **Texture Browser**

A list of the available textures in the scene.



### **Name**

The name of the currently active texture. You can rename the texture here by clicking at the edit box.

### **Fake User**

Keep this texture in the scene even if it has no user.

### **New Texture**

Add a new texture.

### **Remove**

Remove the texture.

### **Show Texture in Texture Tab**

Jumps to the texture tab where you can edit your texture.


### **Channel**

Which channel of the texture to use for masking.



## ***Texture Coordinates***

Which texture coordinates of the texture to use for masking.




## **Multiple Strokes**

Grease Pencil Object only. Adds multiple parallel copies of the stroke around the original stroke.

### **Duplicates**

The number of additional strokes.

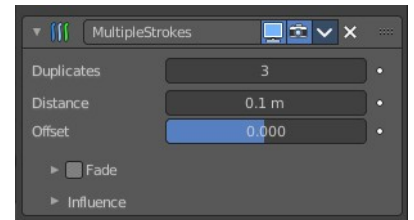

### **Distance**


Distance between the original and the duplicate strokes.

### **Offset**

Control the offset position (inner or outer) for duplicate strokes.

### **Fade**

Fade out duplicate strokes, using their opacity or thickness.



### **Center**

Control the initial position for the fading.

### **Thickness**

Fade influence on strokes thickness.


### **Opacity**

Fade influence on strokes opacity.

### **Influence**

#### **Layer**

Restricts the effect only to one layer or to any layers that share the same pass index. Click to pick the layer that you want to use.

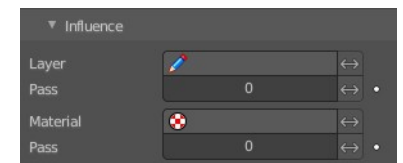

#### **Invert**

Inverts the influence.



## **Pass**

The layer pass index.

## **Invert**

Inverts the influence.

## **Material**

Restricts the effect only to material that share the same material or pass index. Click to pick the material that you want to use.

## **Invert**

Inverts the influence.

## **Pass**

The material pass index.


## **Invert**

Inverts the influence.

---

## **Simplify modifier**

Grease Pencil Object only. The Simplify modifier allows you to reduce the amount of points in the strokes. It tries to reduce points while maintaining the lines shape.

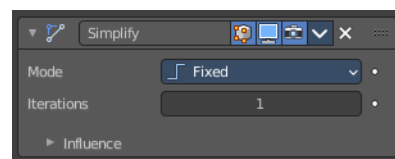

## **Mode**

How to reduce points in the strokes.

## **Fixed**

Deletes alternated points in the strokes, except the start and end points.

## **Adaptive**


Uses the RDP algorithm (Ramer-Douglas-Peucker algorithm) for points deletion. The algorithm try to obtain a similar line shape with fewer points.

## **Sample**

Recreates the stroke geometry with a predefined length between points.

## **Merge**

Simplifies the strokes by merging points that are closer than a specified distance to each other.




## ***Iterations***

Number of times to repeat the procedure.

## **Influence**

### ***Layer***

Restricts the effect only to one layer or to any layers that share the same pass index. Click to pick the layer that you want to use.

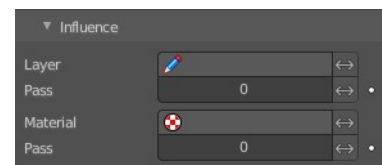

### **Invert**

Inverts the influence.

### ***Pass***

The layer pass index.

### **Invert**

Inverts the influence.

### ***Material***

Restricts the effect only to material that share the same material or pass index. Click to pick the material that you want to use.

### **Invert**

Inverts the influence.

### ***Pass***

The material pass index.


### **Invert**

Inverts the influence.

---

## **Subdivide modifier**

Grease Pencil Object only. The Subdivide modifier subdivide the strokes by inserting points between other points to the lines.

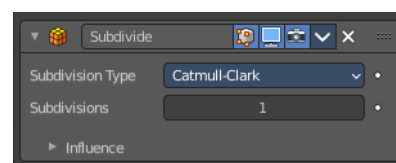

### **Subdivision Type**

#### ***Catmull-Clark***

Subdivides and smooths the surfaces.



## ***Simple***

Only subdivides the surfaces, without any smoothing.


## **Subdivisions**

Number of subdivisions.

## **Influence**

### ***Layer***

Restricts the effect only to one layer or to any layers that share the same pass index. Click to pick the layer that you want to use.

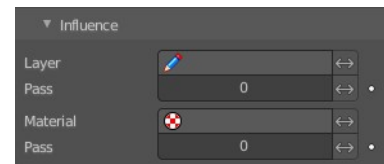

### **Invert**

Inverts the influence.

### ***Pass***

The layer pass index.

### **Invert**

Inverts the influence.

### ***Material***

Restricts the effect only to material that share the same material or pass index. Click to pick the material that you want to use.

### **Invert**

Inverts the influence.

### ***Pass***

The material pass index.

### **Invert**

Inverts the influence.