



## 26.3 Editors - Properties Editor - Output Properties Tab

### Table of content

Detailed table of content.....	1
Output Properties Tab.....	5
Render Engine.....	5
Dimensions Panel.....	5
Presets.....	5
Resolution X / Y.....	5
Aspect X / Y.....	6
Render Region.....	6
Frame Rate.....	6
Frame Range Panel.....	6
Frame Start / End.....	6
Frame Step.....	6
Time Stretching.....	7
Stereoscopy Panel.....	7
Workflow.....	7
Stereo 3D / Multiview.....	8
List of Cameras.....	9
Add / Remove / Rename.....	9
Suffix.....	9
Output Views Subpanel.....	9
Output Panel.....	12
File Path.....	12
Load File.....	12
File Format.....	12
Transparent.....	15
Options subpanel.....	15
Color management subpanel.....	16
Transparent subpanel.....	19
Metadata Panel.....	20
Metadata Input.....	20
Include.....	20
Note.....	20
Burn into Image.....	20
Post Processing Panel.....	21
Pipeline.....	21
Dither.....	21

### Detailed table of content

### Detailed table of content

Detailed table of content.....	1
Output Properties Tab.....	5
Render Engine.....	5
Dimensions Panel.....	5


Presets.....	5
Resolution X / Y.....	5
Aspect X / Y.....	6
Render Region.....	6
Crop to Render Region.....	6
Frame Rate.....	6
Frame Range Panel.....	6
Frame Start / End.....	6
Frame Step.....	6
FPS.....	6
Base.....	6
Time Stretching.....	7
Old.....	7
New.....	7
Stereoscopy Panel.....	7
Workflow.....	7
Stereo 3D / Multiview.....	8
List of Cameras.....	9
Resize handler.....	9
Search field.....	9
Add / Remove / Rename.....	9
Suffix.....	9
Output Views Subpanel.....	9
Individual.....	9
Stereo 3D.....	10
Stereo Mode.....	10
Stereo Mode Type Anaglyph.....	10
Anaglyph Type.....	10
Stereo Mode Type Interlace.....	10
Interlace Type.....	10
Swap Left/Right.....	10
Stereo Mode Type Side by Side.....	11
Cross Eyed.....	11
Squeezed Frame.....	11
Stereo Mode Type Top Bottom.....	11
Squeezed Frame.....	11
Output Panel.....	12
File Path.....	12
Load File.....	12
File Format.....	12
Image file formats.....	12
BMP.....	12
Color.....	12
Iris.....	12
Color.....	12
PNG.....	12
Color.....	12
Color Depth.....	13
Compression.....	13
JPEG.....	13
Color.....	13
Quality.....	13
JPEG 2000.....	13

Color.....	13
Color Depth.....	13
Quality.....	13
Codec.....	13
Cinema.....	13
Cinema (48).....	13
YCC.....	13
Targa.....	13
Color.....	13
Targa Raw.....	13
Cineon.....	13
Color.....	13
DPX.....	14
Color.....	14
Color Depth.....	14
Log.....	14
Open EXR Multilayer.....	14
Color.....	14
Color Depth.....	14
Codec.....	14
Preview.....	14
Open EXR.....	14
Color.....	14
Color Depth.....	14
Codec.....	14
Z Buffer.....	14
Preview.....	14
Radiance HDR.....	15
Color.....	15
TIFF.....	15
Color.....	15
Color Depth.....	15
Compression.....	15
Movie file formats.....	15
AVI Jpeg.....	15
Color.....	15
Quality.....	15
AVI Raw.....	15
Color.....	15
FFmpeg video.....	15
Color.....	15
Transparent.....	15
Options subpanel.....	15
Saving.....	16
File Extensions.....	16
Cache Result.....	16
Image Sequence.....	16
Overwrite.....	16
Placeholders.....	16
Color management subpanel.....	16
Color management settings.....	16
Follow scene.....	16
Override.....	16

Display Device.....	16
View Transform.....	16
Standard.....	17
Filmic.....	17
Filmic Log.....	17
Raw.....	17
False Color.....	17
Look.....	17
Exposure.....	17
Gamma.....	17
Use Curves.....	17
Navigation elements.....	17
Zoom in and out.....	17
Tools.....	18
Reset View.....	18
Vector Handle.....	18
Auto Handle.....	18
Auto Clamped Handle.....	18
Extend Horizontal.....	18
Extend Extrapolated.....	18
Reset Curve.....	18
Use Clipping.....	18
Delete Points.....	18
Black Level.....	18
White Level.....	18
Hotkeys for Black and White Level.....	18
Reset.....	19
Transparent subpanel.....	19
Transparent Glass.....	19
Roughness Threshold.....	19
Metadata Panel.....	20
Metadata Input.....	20
Include.....	20
Note.....	20
Burn into Image.....	20
Font Size.....	20
Text Color.....	20
Background.....	21
Include Labels.....	21
Post Processing Panel.....	21
Pipeline.....	21
Compositing.....	21
Sequencer.....	21
Dither.....	21

## Output Properties Tab

The Output properties contains all the settings to render the final image or movie. Most of the settings are the same for all three available render engines.

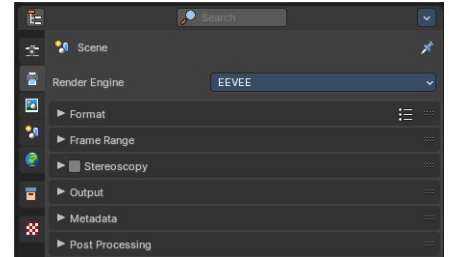


## Render Engine

Shows the active render engine. Specific renderers do have other settings. And you can also switch to another renderer. But note that this is more a visual guide. It misses the Cycles render settings.

## Dimensions Panel

This panel contains the dimension settings.


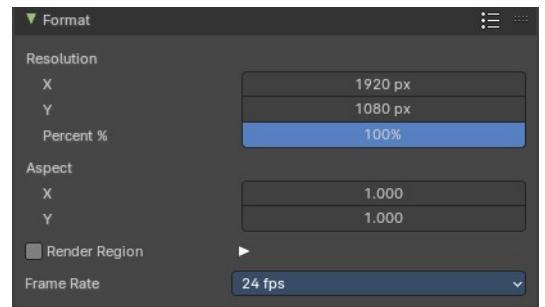


## Presets

A list of dimension presets with the most common settings.

To add a new preset type in a new preset name into the edit box at the end of the list, and click at the + sign.

To remove a preset click at the - sign behind the name.

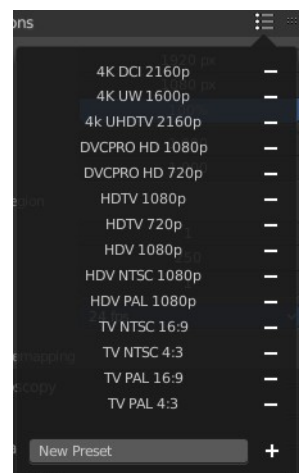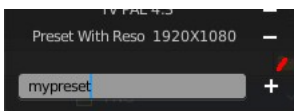

## Resolution X / Y

The dimensions of the image in pixels.

%

Render the image in per cent of the original image. You can for example render in 200% of the resolution values. Or in 50%.

## Aspect X / Y

The image aspect ratio. For anamorphic or non square pixel output.

## Render Region



Activate render region for the output image.

There is a render region feature in the 3D view and in the Image editor where you can render a portion of the screen for preview purposes. Normally the output will always render the full image then, regardless of the render region. When you activate Render Region then the output will also render the render region only, and not the full image.

## Crop to Render Region

Crop the output image to the size of the render region.

## Frame Rate


The output frame rate. When you choose custom then two more properties appears.



# Frame Range Panel

## Frame Start / End

The start and end frame for an animation.

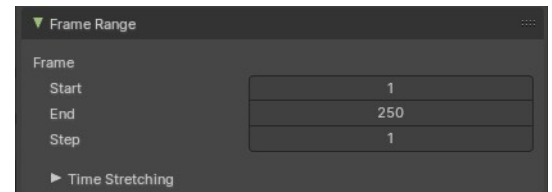

## Frame Step

Number of frames to skip forward while playing the animation. With a value of 2 every second frame gets skipped.

## FPS

The custom frame per seconds value.

## Base

Frame rate base. A multiplier that makes it for example possible to set up 29,97 Frames instead of 30 for NTSC.

## Time Stretching


Remap the length of an animation.

### Old

The old length.

### New


The new length.

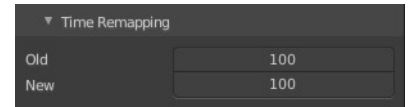

## Stereoscopy Panel


Allows you to render out stereoscopic images from the active camera. For the anaglyph images you need special stereoscopy glasses to see the 3D effect. And in case of the interlace method a 3d ready monitor and shutter glasses.

The anaglyph method is to create stereo images. The interlace method is mostly used in movies.

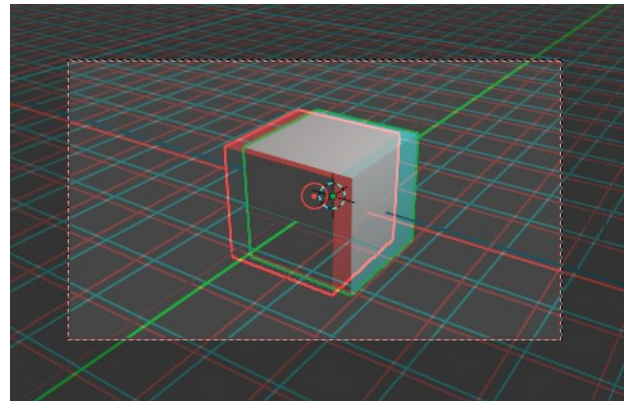

## Workflow



Turn on Stereoscopy.

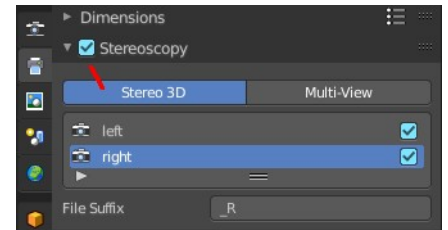

Select the Camera in the Outliner. In the Properties Editor choose the Object Data Properties tab (which should show a camera icon at this point), and open the Stereoscopy panel.


Change the Convergence Plane Distance to your needs. This can also be done in the 3D view with the handlers when you are in Camera view.

Interocular distance is the distance between the left and the right camera.

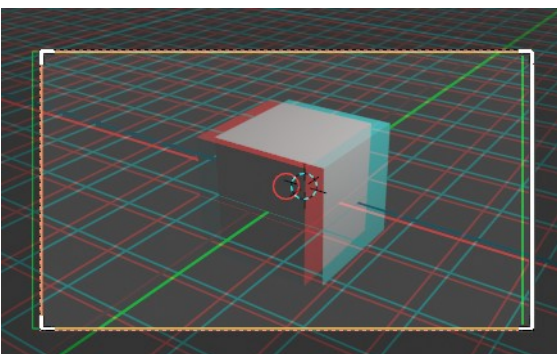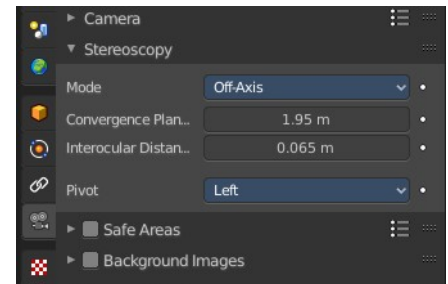


Outside of the camera view you will see this plane in front of the camera.

Adjust the plane to your needs. The plane is the reference point. Everything behind appears behind the focus. Everything before the plane appears before the focus.

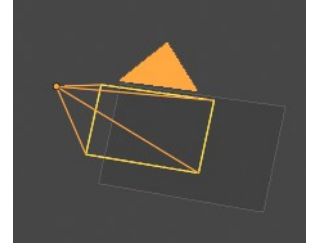


In the sidebar in the 3D view you will find further settings.

Turn on volume to see if the objects are inside of the volume.

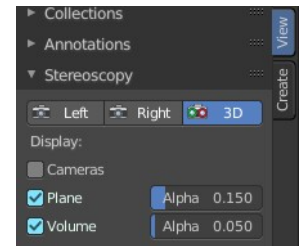

Do a preview rendering, and adjust the settings if required.



Go back to the Output tab to the Output panel. By activating stereoscopy here is a new section called Views. Here you can find further export settings.

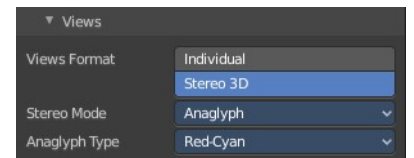


## Stereo 3D / Multiview

The stereoscopy method. Stereo 3D uses two predefined virtual cameras. The camera settings gets inherited from the main camera.

Multiview allows you to set up several cameras manually. You need to create every camera by hand. And you need to follow name conventions to get this to work. In the outliner give the cameras the suffix that you want to use in the list. Here three cameras with a suffix.

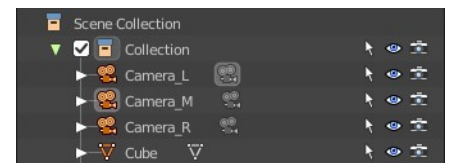


Now do the same in the list of cameras. Give every camera the same suffix than in the outliner. The camera name is not important. Important is the suffix. This is the identifier.

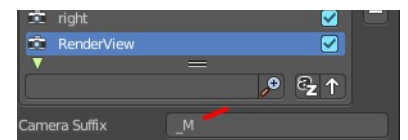

And in the render window you have now the render result of your three cameras.

Note that for stereoscopy just two cameras gets used for rendering the anaglyph or interlaced result. Usually the ones with suffix \_L and \_R. So our third camera does not influence the stereoscopic image here.

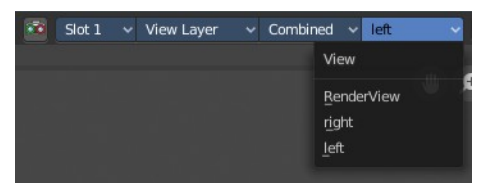



## List of Cameras

The list of cameras. Note that with method Stereo 3D these cameras does not exist in the outliner. They are virtually created as child objects to the main camera that you use for rendering.



In this list you can choose the cameras to change the suffix.

The checkbox allows you to disable the cameras. Both options are just of interest for the multi-view setup. Normal stereoscopy setup does not require any further setup.


## Resize handler

The resize handler allows you to resize the list.




## Search field

The triangle button down left allows you to open a search field.

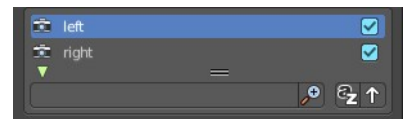

## Add / Remove / Rename

Add adds a custom camera. Remove removes a custom camera. And custom cameras can be renamed by clicking at the name.

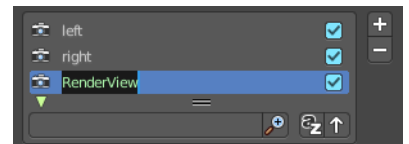

The camera names left and right can't be renamed, and you can't remove them from the list. Individual cameras can be renamed and removed.

## Suffix


The camera identifier. The suffix gets appended at the end of the single images of the camera. The left camera has the suffix `_L`, and the right camera has the suffix `_R`



## Output Views Subpanel

This subpanel just shows with Stereoscopy enabled!

Adjust the stereoscopy export settings. Note that this settings does not adjust what you view in the image editor. This settings influences what you save from the image editor then.

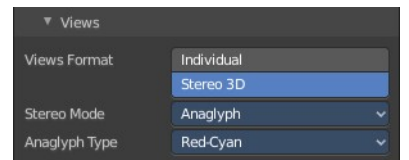

## Individual


Save out single images from each camera when you save the result from the image editor. So for a stereoscopic image two images for the two cameras.

## Stereo 3D

Save out the stereoscopic image as a single image when you save the result from the image editor.



### Stereo Mode

How to export the stereoscopic image with save as in the image editor. There are four methods available.



### Stereo Mode Type Anaglyph

Render Views for left and right eyes as two differently filtered colors in a single image. You need anaglyph glasses to see the 3d effect.

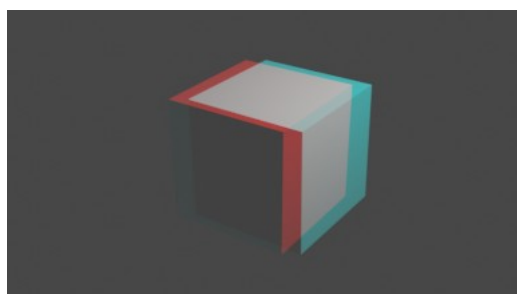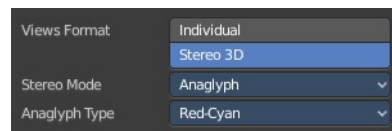


### Anaglyph Type

The color model to display the graphics.



### Stereo Mode Type Interlace

Render Views from left and right eyes interlaced into a single image. You need a 3D Ready monitor to see the stereo effect.

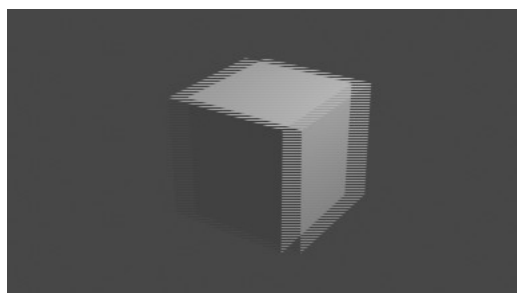


### Interlace Type

The interlace type that you can choose.

### Swap Left/Right

Swaps left and right camera view.



## Stereo Mode Type Side by Side


Renders images of the two cameras side by side.

### ***Cross Eyed***

Swaps left and right camera view.

### ***Squeezed Frame***

Combine both views in a squeezed image.


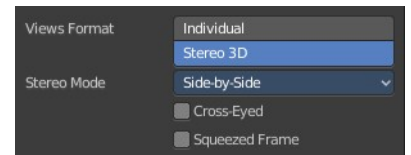


## Stereo Mode Type Top Bottom

Renders images of the two cameras side by side.

### ***Squeezed Frame***

Combine both views in a squeezed image.

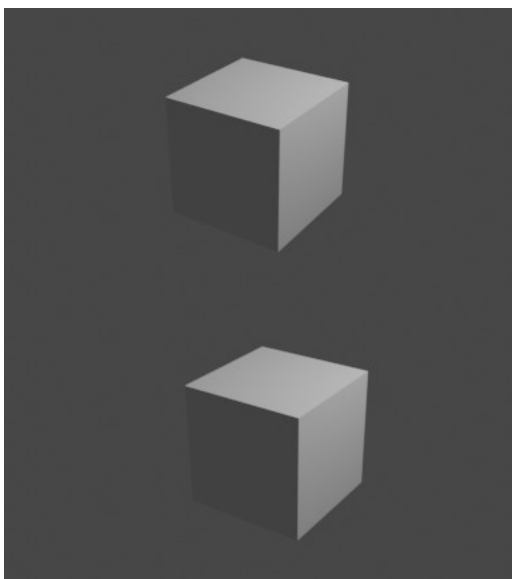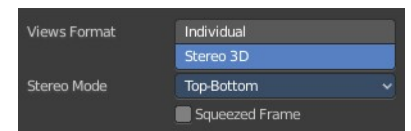

# Output Panel



The file output settings.

## File Path

The location to save rendered frames. Here you will find rendered animation sequences. For single images you can save out the result in the image editor.

When rendering an animation, the frame number is appended at the end of the file name with four padded zeros (e.g. `image00001.png`). You can set a custom padding size by adding the appropriate number of # anywhere in the file name (e.g. `image_##_test.png` translates to `image_01_test.png`).

This setting expands relative paths where a `//` prefix represents the directory of the current blend-file.

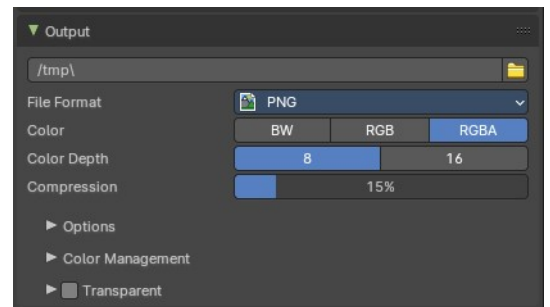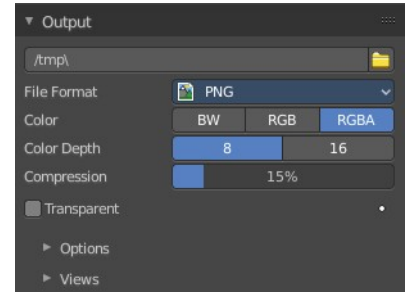


## Load File

Here you can load an existing file to overwrite it. Or you can use it to load a file in a directory and rename it then to your destination file name.

## File Format

The output file format.

Each file format has some own settings.

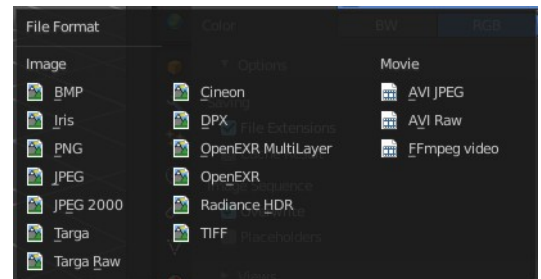


## Image file formats

### BMP

#### Color

The output color format. Black and white or rgb.



### Iris

#### Color


The output color format. Black and white, rgb or rgba.



### PNG

#### Color

The output color format. Black and white, rgb or rgba.

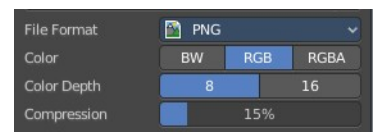

## Color Depth

8 or 16 colors per channel.

## Compression

The compression level.

## JPEG

### Color

The output color format. Black and white, or rgb.

### Quality

The jpeg quality.



## JPEG 2000

### Color

The output color format. Black and white, rgb or rgba.

### Color Depth

8, 12 or 16 colors per channel.

### Quality

The jpeg quality.

### Codec

Which jpeg 2000 codec to use.

### Cinema



Use OpenJpeg Cinema preset.

### Cinema (48)

Use OpenJpeg Cinema (48) preset.

### YCC

Save luminance / chrominance / chrominance channels instead of rgb channels.

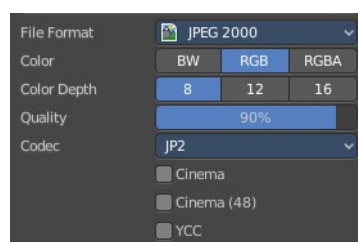

## Targa

### Color


The output color format. Black and white, rgb or rgba.

## Targa Raw

## Cineon

### Color

The output color format. Black and white, or rgb.



Gamma of 1.7 and Non-Linear is hard coded.

## ***DPX***

### **Color**


The output color format. Black and white, rgb, or RGBA.

### **Color Depth**

8, 10, 12 or 16 colors per channel.

### **Log**

Convert to logarithmic color space.

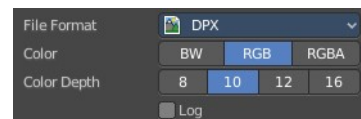

## ***Open EXR Multilayer***

### **Color**

The output color format. Black and white, rgb, or RGBA.

### **Color Depth**


Float half values or Float full values per channel.

### **Codec**

What codec to use.

### **Preview**

When rendering animations, save Jpeg preview images into the same directory.

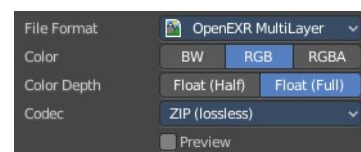

## ***Open EXR***

### **Color**

The output color format. Black and white, rgb, or RGBA.

### **Color Depth**

Float half values or Float full values per channel.

### **Codec**




What codec to use.

### **Z Buffer**

Save the Z Depth per pixel. 32 Bit unsigned int Z Buffer.

### **Preview**


When rendering animations, save Jpeg preview images into the same directory.

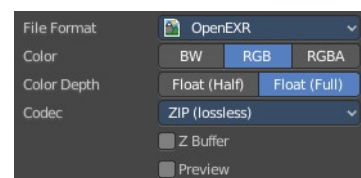

## ***Radiance HDR***

### **Color**


The output color format. Black and white, or rgb.

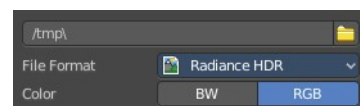

## ***TIFF***

### **Color**

The output color format. Black and white, rgb, or RGBA.

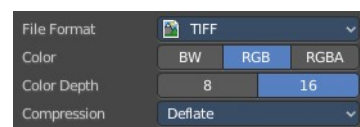


### **Color Depth**

8 or 16 bit per channel.

### **Compression**

The compression method.



## **Movie file formats**

### ***AVI Jpeg***

### **Color**

The output color format. Black and white, or rgb.



### **Quality**

The jpeg quality.

### ***AVI Raw***

### **Color**

The output color format. Black and white, or rgb.



### ***FFmpeg video***

### **Color**

The output color format. Black and white, or rgb.




## **Transparent**

Eevee, Eevee (Legacy), and Workbench renderer. Render and export the result with transparent background.



## **Options subpanel**

Not all options are available for all file formats.

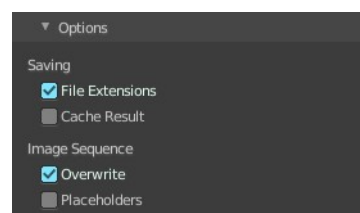

## Saving

### **File Extensions**

Adds the correct file extensions per file type to the output files.

### **Cache Result**

Saves the rendered image and passes to a Multilayer EXR-file in temporary location on your hard drive. This allows the compositor to read these to improve performance, especially for heavy compositing.

## Image Sequence

### **Overwrite**

Overwrite existing files when rendering.

### **Placeholders**

Create empty placeholder frames while rendering.

## Color management subpanel

### Color management settings

#### **Follow scene**

Uses the color management from the scene.

#### **Override**

Uses the color management settings that is defined below instead of the color management from the scene.


This settings is in most parts equal to the color management settings in the render properties. But has no settings for the Sequencer.

### Display Device

The device that the image is being viewed on. Your monitor.


Most computer monitors are configured for the sRGB color space.

Color management can also be disabled by setting the device to None.

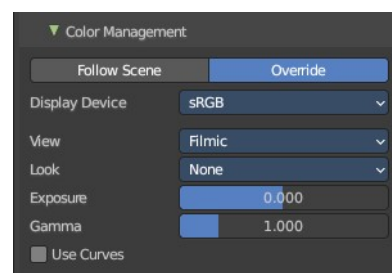

### View Transform

Choose between different ways to view the image on the same monitor.





## Standard

Does no extra conversion besides the conversion for the display device.

## Filmic

For more photo realistic results and better handling of high dynamic range. The contrast can be adjusted by changing the *Look* option for the Filmic view transform.

## Filmic Log

Converts to Filmic log color space. This can be used for export to color grading applications, or to inspect the image by flattening out very dark and light areas.

## Raw

Intended for inspecting the image but not for final export. Raw gives the image without any color space conversion.


## False Color

Shows a heat map of image intensities, to visualize the dynamic range.

---

## Look

Adjust the contrast.

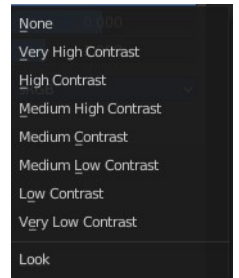

## Exposure


Used to control the image brightness (in stops) applied before color space conversion. The calculation is:  $output\_value = render\_value \times 2^{(exposure)}$

## Gamma

Extra gamma correction applied after color space conversion. Note that the default sRGB or Rec709 color space conversions already include a gamma correction of approximately 2.2 (except the *Raw* and *Log* views), so this would be applied in addition to that.

## Use Curves

Adjust RGB Curves to control image colors before color space conversion.

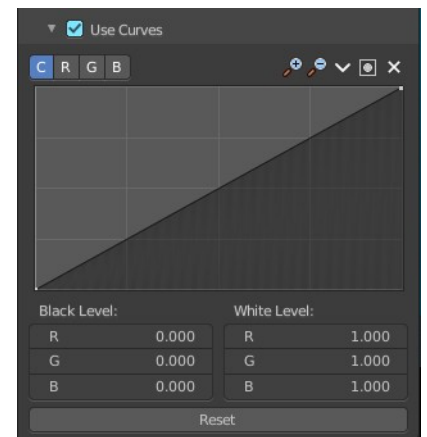

## Navigation elements

The navigation elements at the top are described from left to right.




## Zoom in and out

The two buttons with the magnifying glass at it zooms in and out in the curve window.

## Tools

Tools is a menu that contains some cuve related tools.



### **Reset View**

Resets the curve windows zoom.

### **Vector Handle**

Set handle type to Vector.

### **Auto Handle**

Set handle type to Auto.

### **Auto Clamped Handle**

Set handle type to Auto Clamped.

### **Extend Horizontal**

Causes the curve to stay horizontal before the first point and after the last point.

### **Extend Extrapolated**


Causes the curve to extrapolate before the first point and after the last point, based on the shape of the curve.

### **Reset Curve**

Resets the curve to the initial shape.

## Use Clipping

Clipping options. Set up clipping for the stroke.

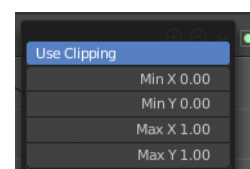

## Delete Points


Deletes selected curve points.

## Black Level

The color that Black is mapped to.

## White Level

The color that White is mapped to.




## Hotkeys for Black and White Level

You may want to sample the black and white level colors directly in the image by clicking at an area. There are hotkeys for that.

**Ctrl + Left Mouse** click in the image sets the Black level value from that position.

**Shift + Left Mouse** click in the image sets the White Level value from that position.

To see the result you need to tick the View as Render button.

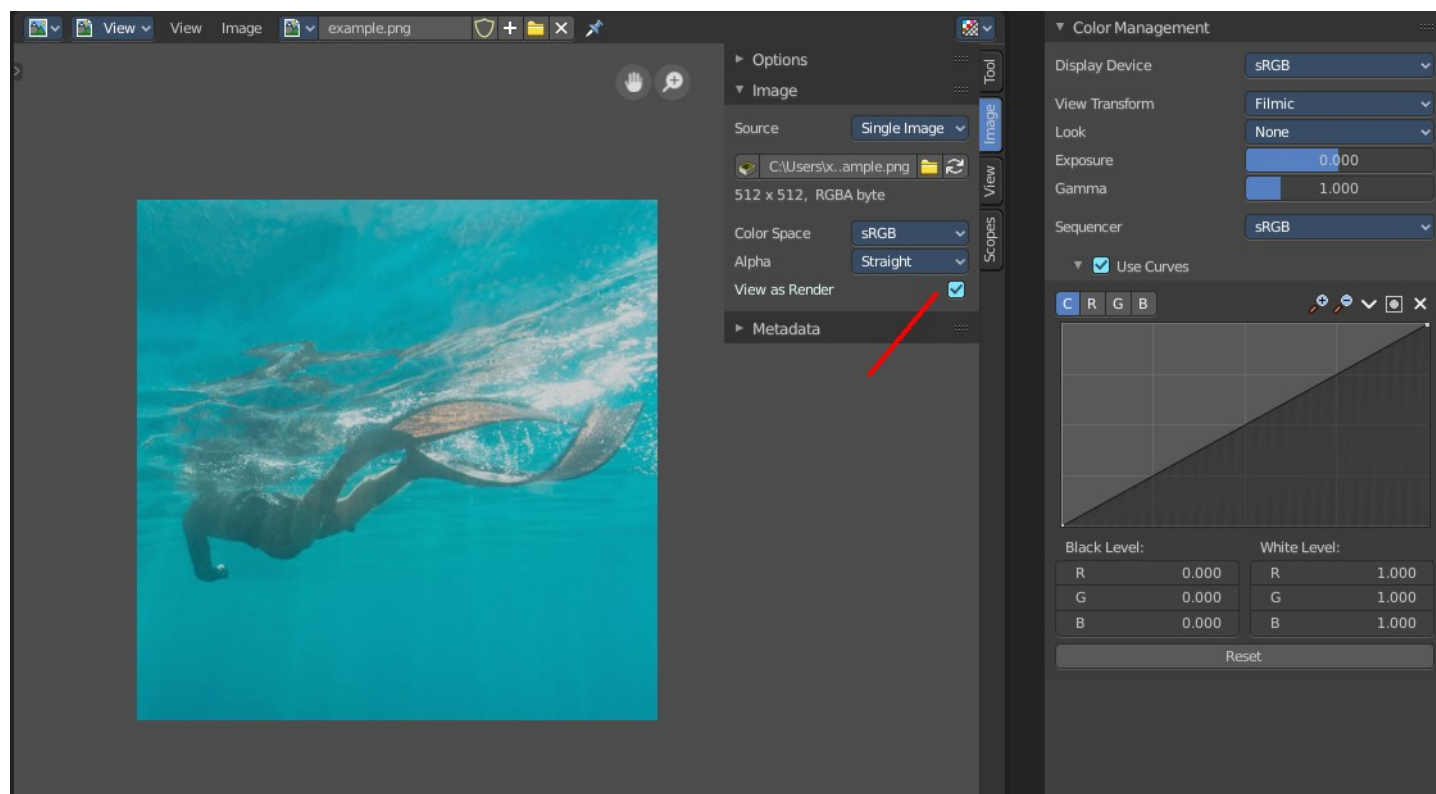


### **Reset**

Resets the Curve and the Black and White Level values to the default values.

### **Transparent subpanel**

Cycles only. Enable the rendering of transparent background.

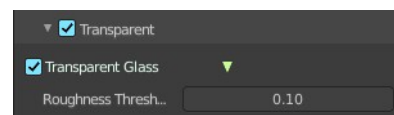

### **Transparent Glass**


Render glass with transparent background.

### **Roughness Threshold**

For transparent transmission. Keep surfaces with roughness above the threshold opaque.


# Metadata Panel

What metadata to include into the image or movie.

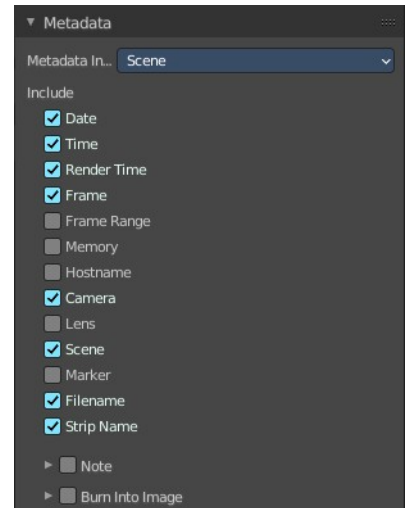

## Metadata Input

Where to get the Metadata from.




## Include

What Metadata to include.





## Note

Include a custom comment.



## Burn into Image

Render the stamp info text into the image. The information is cluttered across the rendered image. Parts of it appears up left in the rendering. Parts down left, and parts down right.

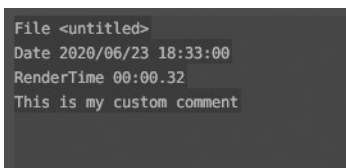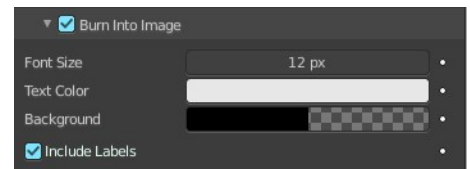

The props have decorators. This means this information can be keyframed. The font itself is the system font, and cannot be changed.

## Font Size

The font size.

## Text Color

The text color.

## Background


The background color of the text.

## Include Labels

Display stamp labels like "Camera" in front of camera name, etc.

# Post Processing Panel

Enable Post Processing.

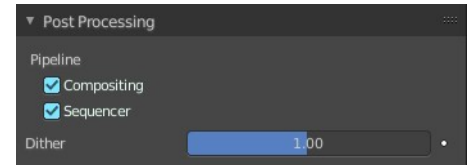

## Pipeline

### Compositing

Process the pipeline through the compositing in case compositing nodes are enabled.

### Sequencer

Process the pipeline (and composited result) through the video sequence pipeline in case Sequencer strips exists.

### Dither

Amount of dithering noise added to the rendered image to break up banding.

This prop has a decorator, and can be keyframe animated.