



26.14.8 Editors - Properties Editor - Object Data Properties Tab - Armature Object

Table of content

Detailed table of content.....	1
Pose panel.....	4
Position.....	4
Bone Collections panel.....	4
List View.....	4
Add / Remove.....	5
Move Bone Group Up / Down.....	5
Bone collection specials.....	5
Assign.....	5
Remove.....	5
Select.....	5
Deselect.....	5
Motion Paths panel.....	5
Workflow.....	6
Paths Type.....	6
Frame Range Start.....	6
End.....	6
Step.....	6
Bone Cache from.....	6
To.....	7
Calculate	7
Update Paths.....	7
Update All Paths.....	7
Clear Paths.....	7
Display subpanel.....	7
Viewport Display panel.....	8
Display As.....	8
Names.....	9
Shapes.....	9
Bone Colors.....	9
In Front.....	9
Axes.....	9
Relations.....	10
Inverse Kinematics panel.....	10
IK Solver.....	10
Custom Properties Panel.....	14
Add.....	14
Edit.....	15
Remove.....	15

Detailed table of content

Detailed table of content


Detailed table of content.....	1
--------------------------------	---

Pose panel.....	4
Position.....	4
Bone Collections panel.....	4
List View.....	4
Drag Handler.....	4
Search Field.....	4
Invert.....	4
Sort by Name.....	5
Add / Remove.....	5
Move Bone Group Up / Down.....	5
Bone collection specials.....	5
Solo Visibility.....	5
Show All.....	5
Assign.....	5
Remove.....	5
Select.....	5
Deselect.....	5
Motion Paths panel.....	5
Workflow.....	6
Paths Type.....	6
In Range.....	6
Around Frame.....	6
Frame Range Start.....	6
End.....	6
Step.....	6
Bone Cache from.....	6
To.....	7
Calculate	7
Start.....	7
End.....	7
Bake Location.....	7
Update Paths.....	7
Update All Paths.....	7
Clear Paths.....	7
Display subpanel.....	7
Frame Numbers.....	7
Keyframes.....	7
+ Non-Grouped Keyframes.....	8
Keyframe Numbers.....	8
Lines.....	8
Thickness.....	8
Custom Color.....	8
Viewport Display panel.....	8
Display As.....	8
Octahedral.....	8
Stick.....	8
B-Bone.....	9
Envelope.....	9
Wire.....	9
Names.....	9
Shapes.....	9
Bone Colors.....	9
In Front.....	9

Axes.....	9
Position.....	10
Relations.....	10
Head.....	10
Tail.....	10
Inverse Kinematics panel.....	10
IK Solver.....	10
Standard.....	10
iTaSC.....	10
Mode.....	10
Animation.....	10
Precision.....	11
Iterations.....	11
Solver.....	11
SDLS.....	11
DLS.....	11
Damping Max.....	11
Damping Epsilon.....	11
Simulation.....	12
Reiteration.....	12
Never.....	12
Initial.....	12
Always.....	12
Precision.....	12
Iterations.....	12
Solver.....	12
SDLS.....	12
Feedback.....	13
Max Velocity.....	13
DLS.....	13
Feedback.....	13
Max Velocity.....	13
Damping Max.....	14
Damping Epsilon.....	14
Auto Step.....	14
Steps.....	14
Min.....	14
Max.....	14
Custom Properties Panel.....	14
Add.....	14
Edit.....	15
Remove.....	15

Pose panel

This panel allows you to turn the display for bone and armature layers on and off.



Position

Switch between Pose Position and Rest Position.

Pose position shows the armature in the currently posed state.

Rest Position shows the armature in the rest position. In Rest Pose mode there is no posing possible.



Bone Collections panel

This panel allows the creation, deletion and editing of Bone Collections.

Bone Collection can be used for bone selections.


Bone Collections is a Pose Mode and Edit Mode feature. The controls will be disabled in Object mode.

Note: Using collection selections, you can then assign a color to the bone group in the Properties Editor > Bone Properties Tab. For example, you can color the left parts of the rig as blue and right parts as red – and you can also assign a color per edit and pose mode.

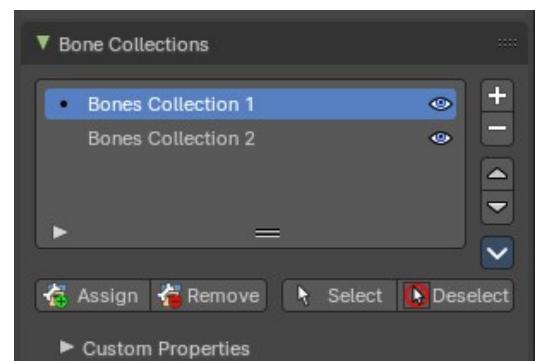

List View

The List view with the bone collections. Double clicking at the name makes it editable.

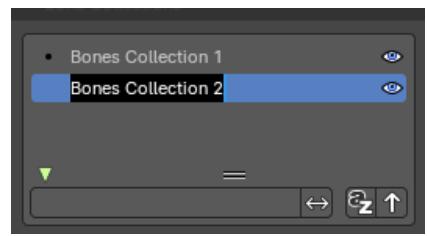

Drag Handler

The two vertical lines at the end is a handler with which you can expand the list.

Search Field

You can expand a search field at the bottom of the list. Type in your term and hit enter to filter for your term.



Invert

Exclude the search term instead of searching for it.

Sort by Name

Sort the List by name.

Add / Remove

Add or remove a bone group.


Move Bone Group Up / Down

Move the selected bone group up or down in the list.

Bone collection specials

Solo Visibility

Hide all other bone collections and shows the selected active collection only.



Show All

Show all collections.

Assign



Assigns the selected bones to the active bone collection.

Note: A bone can belong to multiple collections.

Remove

Removes the selected bones from the active bone collection.

Select


Selects the bones in the active bone collection.

Deselect

Deselects the bones in the active bone collection.


Motion Paths panel

Motion paths allows you to visualize motion paths of animated bones.

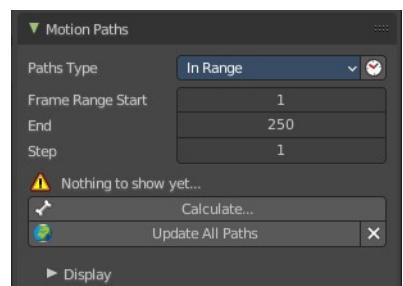

Workflow

Select the bones that you want to calculate a path for. Note that they should have an animation. No animation, no motion path.



Click at the Calculate button.

When you change the animation then you might need to update the paths.

To remove the paths, click at the X button at the Update paths button.



Note! Remember that only selected bones and their paths are affected by these actions!


The paths are shown in a light shade of gray for unselected points, and a slightly blueish gray for selected ones. Around the current frame a glow indicate the direction of movement: blue towards future frames and green towards the past. Each frame is displayed by a small white dot on the paths.

The paths are automatically updated when you edit your poses/keyframes, and they are also active during animation playback. Playing the animation affects the paths only when the Around Current Frame option is enabled.

Paths Type

In Range

Display paths of points within specified range.

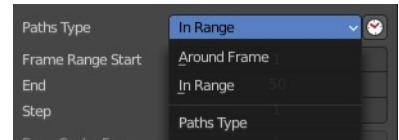

Around Frame

Display paths of points within a fixed number of frames around the current frame. When you enable this button, you get paths for a given number of frames before and after the current one (again, as with ghosts).

Frame Range Start

The start frame for the paths calculation. (not for Around Current Frame Onion-skinning method).

End

The end frame for the paths calculation. (not for Around Current Frame Onion-skinning method).

Step

Display one point for every n frames on the path.

Bone Cache from


The start frame of the range in which motion paths are shown. You cannot modify this range without deleting the motion path first.

To

The end frame of the range in which motion paths are shown. You cannot modify this range without deleting the motion path first.

Calculate ...

Calculate Paths will create a new motion path in cache. It will open a popup where you can adjust the settings.



Start


The start frame of the path.

End

The end frame of the path.


Bake Location

Where to display the path. At the heads of the bones or at the tail of the bones.



Update Paths

If a path has already been calculated, Update Paths will update the path shape to the current animation. To change the frame range of the calculated path, you need to delete the path and calculate it again.

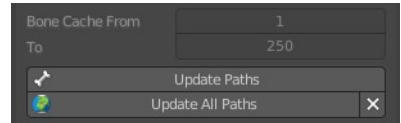

Update All Paths

Update all paths will update not just the path for the selected object, but also for all other paths in the object hierarchy.

Clear Paths


Removes all paths in the hierarchy.

Bone Calculate From and To is internal, and cannot be edited. Just ignore.

Display subpanel

Frame Numbers

Show a small number of the corresponding frame next to each frame dot on the path.

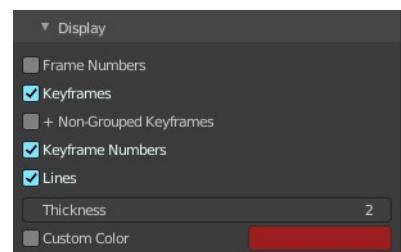

Keyframes

Show the keyframes at the path, with frame number.



+ Non-Grouped Keyframes

For bone motion paths, it searches the whole Action for keyframes instead of in groups with matching name only (this is slower).

Keyframe Numbers

When enabled, you will see the numbers of the displayed keyframes, so this option is obviously only valid when Show Keys is enabled.

Lines

Toggles whether the lines between the points are shown.

Thickness


Customizable thickness for the lines.

Custom Color

Custom color for the lines.


Viewport Display panel

Display options for the armature.

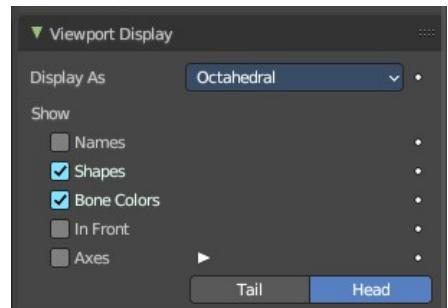


Display As

How the bones are displayed in the 3D Viewport.



Octahederal

Bones are displayed as a octahederal. With a thick and a thin end.






Stick

Bones are displayed as a stick.




B-Bone

Bones are displayed as a cuboid. This bone display type also allows to display bendy bones subdivisions.

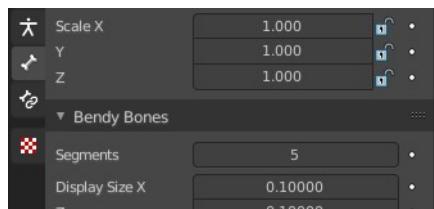



Envelope

Bones are displayed with its envelopes. The bone deformation influence areas.



Wire

Bones are displayed as thin wire lines. This bone display type also allows to display bendy bones subdivisions.



Names

Displays the name of each bone.

Shapes

When enabled, the default standard bone shape is replaced, in Object Mode and Pose Mode, by the shape of a chosen object (see Shaped Bones for details).

Bone Colors

Display Bone Collection colors to color the bone, if a color set is assigned in the Bone Tab > Viewport Display panel.

In Front

Display the armature always in front of mesh objects, even when they are inside.



Axes

When enabled, the (local) axes of each bone are displayed (only relevant for Edit Mode and Pose Mode).



Position

You can give the axes widget an offset. Higher values moves the axes more to the tip. Lower values moves the axes more to the root.

Relations

Display the start point of the relation lines.



Head


The start position of the relation lines from parent to child bones.

Tail

The end position of the relation lines from parent to child bones.

Inverse Kinematics panel

Inverse Kinematics settings.

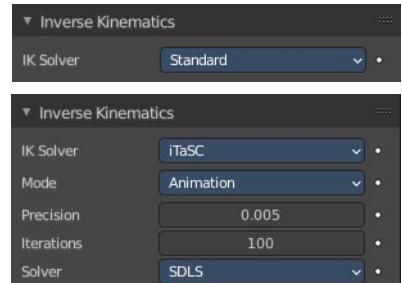

IK Solver

The available IK solver solution. Standard and iTaSC.



Standard

The standard IK solver. It has no further settings.

iTaSC

iTaSC stands for instantaneous Task Specification using Constraints. It is a generic multi-constraint IK solver. It has more settings and works a bit different than the standard IK solver.


Mode

The itasc mode. Animation or Simulation.



Animation

In Animation mode, iTaSC operates like an IK solver: it is stateless and uses the pose from F-curves interpolation as the start pose before the IK convergence. The target velocity is ignored and the solver converges until the given precision is obtained. Still the new solver is usually faster than the old one and provides features that are inherent to iTaSC: multiple targets per bone

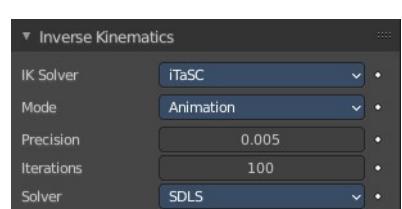

and multiple types of constraints.

Precision


The maximum variation of the end effector between two successive iterations at which a pose is obtained that is stable enough and the solver should stop the iterations. Lower values means higher precision on the end effector position.

Iterations

The upper bound for the number of iterations.

Solver

Select the inverse Jacobian solver that iTaSC will use.




SDLS

Computes the damping automatically by estimating the level of ‘cancellation’ in the armature kinematics. This method works well with the Copy Pose constraint but has the drawback of damping more than necessary around the singular pose, which means slower movements. Note that this is only noticeable in Simulation mode.

The SDLS solver does not work together with a Distance constraint. You must use the DLS solver if you are going to have a singular pose in your animation with the Distance constraint.

DLS

Computes the damping manually. Damping and Epsilon must be tuned for each armature. You should use the smallest values that preserve stability.



Damping Max


Maximum amount of damping. Smaller values means less damping, hence more velocity and better precision but also more risk of oscillation at singular pose. 0 means no damping at all.

Damping Epsilon

Range of the damping zone around singular pose. Smaller values means a smaller zone of control and greater risk of passing over the singular pose, which means oscillation.

Simulation

The Simulation mode estimates the target's velocity, operates in a ‘true time’ context, ignores rotation from keyframes (except via a joint rotation constraint) and builds up a state cache automatically.

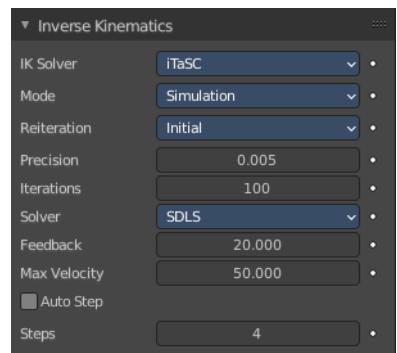

Reiteration

Never

The solver starts from the rest pose and does not reiterate (converges) even for the first frame. This means that it will take a few frames to get to the target at the start of the animation.

Never will grey out most of the options.

Initial

The solver starts from the rest pose and re-iterates until the given precision is achieved, but only on the first frame (i.e. a frame which doesn't have any previous frame in the cache). This option basically allows you to choose a different start pose than the rest pose and it is the default value. For the subsequent frames, the solver will track the target by integrating the joint velocity computed by the Jacobian solver over the time interval that the frame represents. The precision of the tracking depends on the feedback coefficient, number of substeps and velocity of the target.

Always

The solver re-iterates on each frame until the given precision is achieved. This option omits most of the iTaSC dynamic behavior: the maximum joint velocity and the continuity between frames is not guaranteed anymore in compensation of better precision on the end effector positions. It is an intermediate mode between Animation and real-time Simulation.

Precision


The maximum variation of the end effector between two successive iterations at which a pose is obtained that is stable enough and the solver should stop the iterations. Lower values mean higher precision on the end effector position.

Iterations

The upper bound for the number of iterations.


Solver

Select the inverse Jacobian solver that iTaSC will use.



SDLS

Computes the damping automatically by estimating the level of ‘cancellation’ in the armature kinematics. This method works well with the Copy Pose



constraint but has the drawback of damping more than necessary around the singular pose, which means slower movements. Note that this is only noticeable in Simulation mode.

The SDLS solver does not work together with a Distance constraint. You must use the DLS solver if you are going to have a singular pose in your animation with the Distance constraint.

Feedback

Coefficient on end effector position error to set corrective joint velocity. The time constant of the error correction is the inverse of this value. However, this parameter has little effect on the dynamic of the armature since the algorithm evaluates the target velocity in any case. Setting this parameter to 0 means ‘opening the loop’: the solver tracks the velocity but not the position; the error will accumulate rapidly. Setting this value too high means an excessive amount of correction and risk of instability. The value should be in the range 20-100. Default value is 20, which means that tracking errors are corrected in a typical time of 100-200 ms. The feedback coefficient is the reason why the armature continues to move slightly in Simulation mode even if the target has stopped moving: the residual error is progressively suppressed frame after frame.

Max Velocity

Indicative maximum joint velocity in radian per second. This parameter has an important effect on the armature dynamic. Smaller value will cause the armature to move slowly and lag behind if the targets are moving rapidly. You can simulate an inertia by setting this parameter to a low value.

DLS

Computes the damping manually. Damping and Epsilon must be tuned for each armature. You should use the smallest values that preserve stability.

Solver	DLS
Feedback	20.000
Max Velocity	50.000
Damping Max	0.500
Damping Epsilon	0.150

Feedback

Coefficient on end effector position error to set corrective joint velocity. The time constant of the error correction is the inverse of this value. However, this parameter has little effect on the dynamic of the armature since the algorithm evaluates the target velocity in any case. Setting this parameter to 0 means ‘opening the loop’: the solver tracks the velocity but not the position; the error will accumulate rapidly. Setting this value too high means an excessive amount of correction and risk of instability. The value should be in the range 20-100. Default value is 20, which means that tracking errors are corrected in a typical time of 100-200 ms. The feedback coefficient is the reason why the armature continues to move slightly in Simulation mode even if the target has stopped moving: the residual error is progressively suppressed frame after frame.

Max Velocity

Indicative maximum joint velocity in radian per second. This parameter has an important effect on the armature dynamic. Smaller value will cause the armature to move slowly and lag behind if the targets are moving rapidly. You can simulate an inertia by setting this parameter to a low value.

Damping Max

Maximum amount of damping. Smaller values means less damping, hence more velocity and better precision but also more risk of oscillation at singular pose. 0 means no damping at all.


Damping Epsilon

Range of the damping zone around singular pose. Smaller values means a smaller zone of control and greater risk of passing over the singular pose, which means oscillation.

Auto Step

Let the solver set how many substeps should be executed for each frame.

A sub step is a subdivision on the time between two frames for which the solver evaluates the IK equation and updates the joint position. More substeps means more processing but better precision on tracking the targets. The auto step algorithm estimates the optimal number of steps to get the best trade-off between processing and precision. It works by estimation of the non linearity of the pose and by limiting the amplitude of joint variation during a sub step. It can be configured with the min and max parameters.

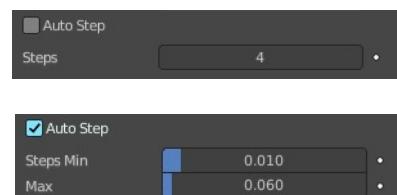

Steps

Auto Step off. Choose a fixed number of substeps with this parameter. Sub step should not be longer than 10 ms, which means the number of steps is 4 for a 25 fps animation. If the armature seems unstable (vibrates) between frames, you can improve the stability by increasing the number of steps.

Min

Auto Step on. Proposed minimum sub step duration (in second). The auto step algorithm may reduce the sub step further based on joint velocity.


Max

Auto Step on. Maximum sub step duration (in second). The auto step algorithm will not allow sub step longer than this value.

Custom Properties Panel

Here you can define custom properties that can be used for scripting.

Here you might also find custom properties from addons or scripts.

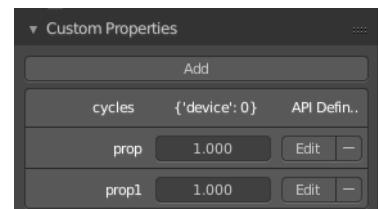


Add

Adds a new property.

Edit

Opens a panel where you can adjust the settings for the custom property.

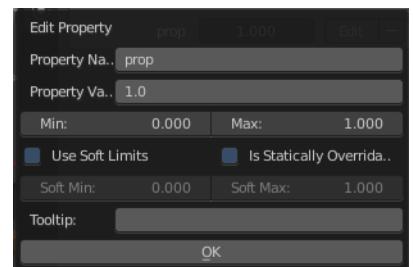

Remove

Removes the property.